

DATASHEET

TRAFFIC MANAGEMENT EDGE DEVICE

COM HUB® RELAY 8



s.m.s, smart microwave sensors GmbH
In den Waashainen 1
38108 Braunschweig
Germany

Phone: +49 531 39023-0
Fax: +49 531 39023-599
info@smartmicro.de
www.smartmicro.com

CONTENT

1	User Safety Warning.....	3
2	Product Specifications	4
2.1	COM HUB Relay 8 Characteristics	6
2.2	Power Supply	7
2.3	COM HUB Relay 8 Connectors	8
2.4	Relays Wiring Diagram	9
2.4.1	Hardware with Internal Input Resistance	9
2.4.2	Hardware without Internal Resistance	10
2.4.2.1	Pull-Up Resistance	10
2.4.2.2	Pull Down Resistance.....	11
2.5	COM HUB Relay 8 Dimensions.....	12
3	Accessories	13
3.1	PLC J-Box.....	13
3.2	PLC to LAN Converter	13
4	Materials	14
5	Sensor Compatibility	14
6	Wiring Recommendation	14
7	Applications.....	15
8	Compliances.....	16
9	Legal Disclaimer Notice	18

1 USER SAFETY WARNING

Please read the entire document carefully before using the device.

INSTALLATION

Please pay attention to the details below before installing and connecting the device:

- Only use provided or approved equipment for the operation.
- Only skilled and instructed people shall install and connect the device.
- All connectors are pin-coded and fit in only one position.
- Be cautious when using the device on or around active roadways and pay attention to moving traffic.
- Make sure that test procedures are in accordance with local safety policies and procedures as well as company practices.

OPERATION

Please note that the device is not waterproof. Take care of proper rain coverage when working outside. Do not operate the device if the device itself or any cables are damaged.

Do not dispose electrical and electronic equipment in household trash.



TECHNICAL SERVICE

Only use provided or approved equipment for operation. Other than authorized and approved electrical technicians should NOT attempt to connect the device to a power supply or other controllers, as there is a risk of electrical shock by unsafe handling of the power source.

Do not attempt to service or repair this device:

- No user-maintainable parts are contained in the device.
- To avoid electrical shock, do not remove or open the cover.
- Unauthorized opening will void all warranties.
- smartmicro is not liable for any damages or harms caused by unauthorized attempts to open or repair the device.

FEATURES

COM HUB Relay 8 has the following features:

- Built-in surge and power protection
- Pluggable terminal block, on/off switch, and fuse for the main DC power supply
- Reset button for software reset
 - o Factory reset: During boot-up, press reset button for 20 seconds until the status LED is solid
 - o IP setting reset: Press reset button for 3 seconds, release the reset button
- PLC interface with 2 pluggable terminal blocks for 2 sensors
- One Gbit speed Ethernet interface and RJ45 LAN connector for Uplink
- One full-duplex RS485 interface and 4 pin screw terminal block
- 8 configurable solid-state relays (normally closed (NC) contacts) and eight relay status LEDs
- Wi-Fi communications with on/off button and automatic turn-off feature
- VPN secure connection
- Real-time clock
- LEDs for power, system status, error, Wi-Fi, PLC, activity
- On-board Traffic Web UI user interface for system configuration, monitoring and diagnostics
- Battery for RTC (Real Time Clock)

NOTE: It is required to use a PLC J-Box to connect a TOPGRD or TRUGRD sensor with COM HUB Relay 8.

TOPGRD and TRUGRD sensors cannot be mixed.

2.1 COM HUB RELAY 8 CHARACTERISTICS

Parameter		Details
Power Supply	Supply Voltage	48V DC ¹
	Min Input Voltage ²	15V DC
	Max Input Voltage	53V DC
	Max Input Current	max. 10A
Sensor Interfaces	PLC	2 ports
Module Interfaces	Ethernet Interface	ETH1: 10/100/1000Mbit
	Wi-Fi Module	Switchable, IEEE 802.11 b/g/n compliant
	RS485 Interface	RS485 Full Duplex
	Status LEDs	Power, Status, Error, Wi-Fi, Activity, PLC
Dimensions	Outline Dimensions (H/W/D)	176.5 x 105 x 51.3mm 6.95 x 4.13 x 2.02 in
	Weight	492 g 17.35 oz
Environment	Operating Temperature	-34...+74°C -29...+165°F
Housing	Case Material	Aluminum/Plastic
Surge Protection	Of Power Lines and Relay	Compliant to IEC 61000-4-2 (ESD) and IEC 61000-4-4 (fast transients)
	Of Data Lines	Compliant to IEC 61000-4-2 (ESD) and IEC 61000-4-4 (fast transients)
Display	Ethernet Activity LEDs	Link and Activity
		Power LED:
	LEDs	✓ Active green: power ON
		✓ Inactive: power OFF
		Status LED:
		✓ Solid green: ongoing update/factory reset
✓ Flashing green: operational (services running)		
Error LED:		
✓ Active red: error (service/application is crashing)		
✓ Inactive: no error		

¹ At 48V DC the maximum tested cable length is 300m. The lower the power supply voltage the shorter the allowed cable distance will be.

² Transient voltages above 53V will be suppressed.

Relay	Wi-Fi LED
	✓ Active yellow: Wi-Fi ON ✓ Inactive: Wi-Fi OFF
	HD-PLC LED
	✓ Active yellow: PLC bus is OK (master and slave detected) ✓ Inactive: PLC bus is not OK (master is missing, or no slave is detected)
	Activity LED
Relay	✓ Specific LED coding based on the microprocessor function
	LED display (8 times):
	✓ Active green: relay is closed ✓ Inactive: relay is open
	Terminal block with screw terminals.ö
	✓ 12-22 AWG ✓ Relay voltage: 0...33V ✓ Relay switching current: max 150mA

Note: The rechargeable battery for the real-time clock has a limited temperature range of: -20...60°C | -4...+140°F.


2.2 POWER SUPPLY

COM HUB relay 8 can be powered by 24VDC or 48VDC. 24VDC is OK for cable lengths below 100m. To reach a longer cable length, up to 300m, the COM HUB Relay 8 shall be powered with a 48VDC power supply. Make sure that the 3rd party power supply has enough power capacity to supply the COM HUB Relay 8 and the desired number of used sensors.

Sensor Type	Power Consumption (may change with temp.)
TRUGRD	~9.5W
TRUGRD Stream	~11W
TOPGRD	~7W
COM HUB Relay 8	~2.5W

2.3 COM HUB RELAY 8 CONNECTORS

The COM HUB Relay 8 has connectors for input power, 2x sensors (via PLC), 8x relays, 1x Ethernet for Uplink and 1x RS485.

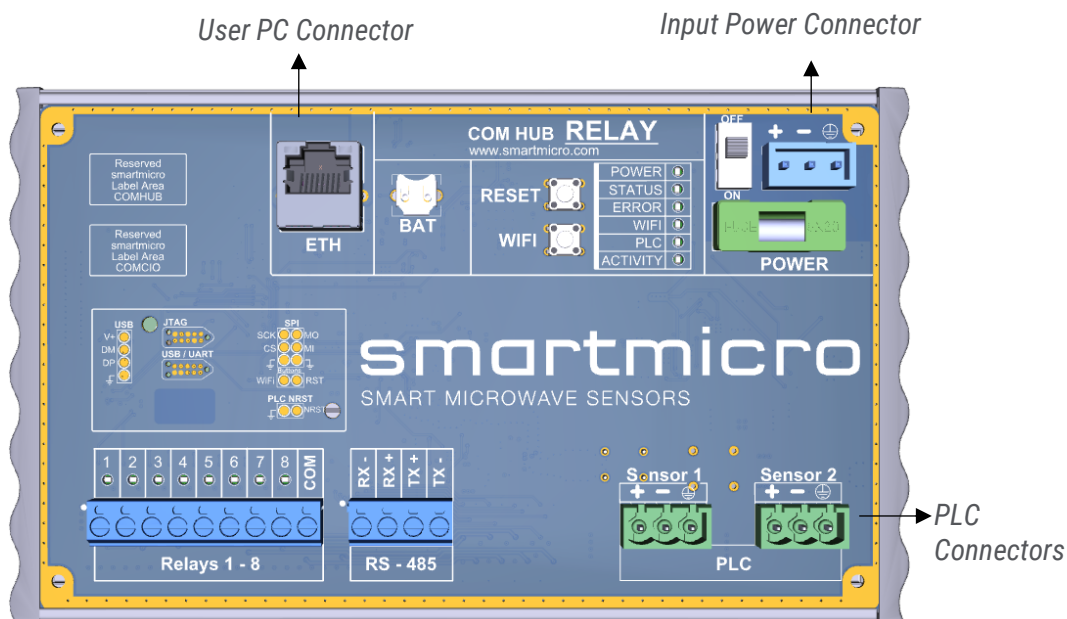

COM HUB Relay 8 interface giving pin descriptions:

Connector	Pin No.	Function
Input Power Connector	1	Cabinet Earth
1x Pluggable Terminal Block 5mm	2	Negative Power Supply PWR-
Supported Cables AWG 24-12	3	Positive Power Supply PWR+
Sensor PLC Connectors	1	Sensor PWR+
2x Pluggable Terminal Blocks 5mm	2	Sensor PWR-
Supported Cables AWG 24-12	3	Shield Earth
ETH RJ45 Connector		Network: External Default IP: 192.168.12.2/24 (user configurable) Usage: User PC
RS485 Connector	1	Sensor RS485 RX -
	2	Sensor RS485 RX +
	3	Sensor RS485 TX +

Relay Connector

4	Sensor RS485 TX -
1	Channel 1
2	Channel 2
3	Channel 3
4	Channel 4
5	Channel 5
6	Channel 6
7	Channel 7
8	Channel 8
COM	shared connection for all relays

2.4 RELAYS WIRING DIAGRAM


Relays are bi-directional but it is recommended to connect the ,COM' pin to ground.

When a zone gets triggered the relay contact will be closed. Based on the maximum relay current of 150mA, the load impedance shall be greater than 160ohm at 24VDC. The recommended load impedance value is 1kohm. AC voltage is not allowed. Relays are normally closed (NC) type.

In the following, 3 different schematics will be presented based on the hardware to which the COM HUB Relay 8 will be connected to.

2.4.1 HARDWARE WITH INTERNAL INPUT RESISTANCE

Usually, traffic controllers have a higher input impedance for their digital or analog input. in this case the relay output can be connected directly to the controller input channel. The traffic controller will configure the internal pull-up or pull-down resistance to have 0V or 24V on active trigger.

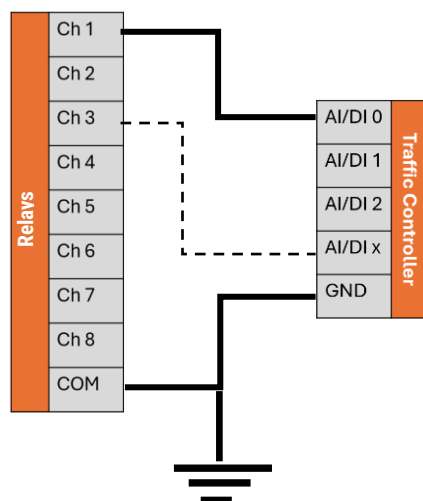


2.4.2 HARDWARE WITHOUT INTERNAL RESISTANCE

For all hardware without internal input resistance for current limitation, 2 use cases are available based on the desired logic, hence, pull-up or pull-down resistance.

2.4.2.1 PULL-UP RESISTANCE

This works as follows:


- Zone is triggered -> relay is closed -> 0V (logic 0) is measured on the hardware input
- Zone is not triggered -> relay is open -> 24V (logic 1) is measured on the hardware input

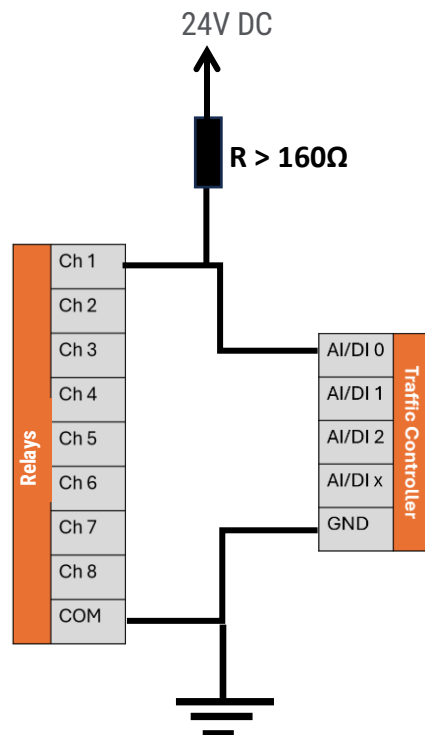

2.4.2.2 PULL DOWN RESISTANCE


This works as follows:

- Zone is triggered -> relay is closed -> 24V (logic 1) is measured on the hardware input
- Zone is not Triggered -> relay is open -> 0V (logic 0) is measured on the hardware input

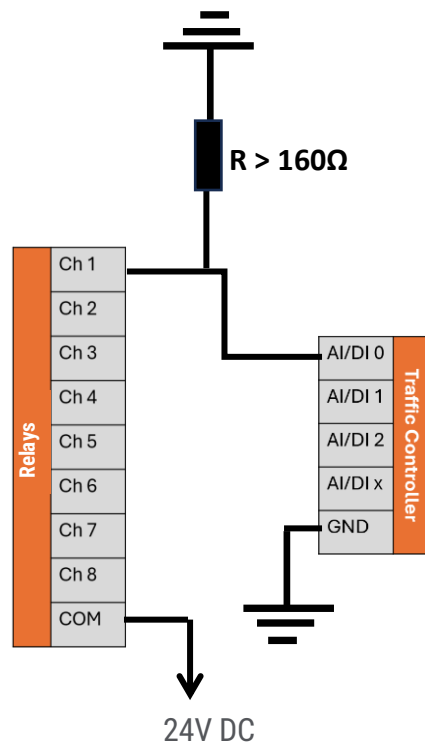

2.5 COM HUB RELAY 8 DIMENSIONS

All values are given in mm and in inch

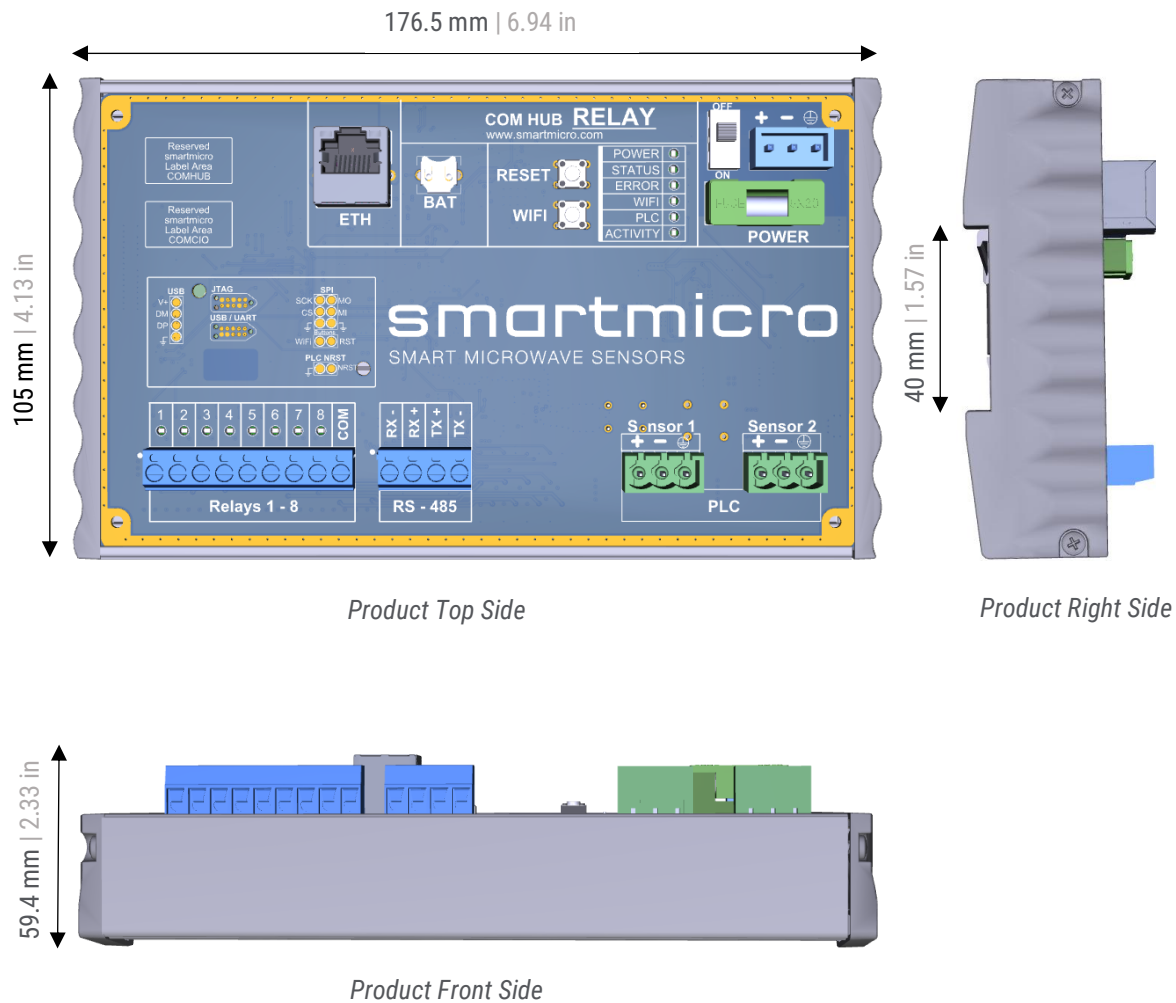

3 ACCESSORIES

There are several accessories available for COM HUB Relay 8.

3.1 PLC J-BOX

When using the COM HUB Relay 8, the PLC J-Box GEN4 is required on the sensor side. It converts in both directions PLC to 4-wire Ethernet.

For more information, please refer to the datasheet of the PLC J-Box.

3.2 PLC TO LAN CONVERTER

Just like the PLC J-Box on sensor side, this terminal converts the PLC data to Ethernet, on the cabinet side. This can be used, for example, if access to the internal network is needed for troubleshooting purposes.

For more information, please refer to the datasheet of the PLC to LAN Converter.

4 MATERIALS

All parts are made of corrosion-resistant materials, such as plastic, stainless steel, anodized aluminum, brass, or gold-plated metal. COM HUB Relay 8 must be used only inside cabinets. It is not water protected.

5 SENSOR COMPATIBILITY

COM HUB Relay 8 is compatible with the following sensors

- TOPGRD
- TRUGRD
- TRUGRD Stream
- TRUGRD Lite

COM HUB Relay 8 is currently not compatible with UMRR-11 sensors.

COM HUB Relay 8 will only allow connections to maximum 2 sensors of the same product family. Mixing TOPGRD and TRUGRD sensors is not allowed.

6 WIRING RECOMMENDATION

A recommended cable between PLC J-Box and COM HUB Relay 8 is Advanced Digital Cable PVC/Nylon 18AWG, Part Number 6803SD. In case you want to use another cable, please contact smartmicro for approval.


7 APPLICATIONS

Traffic light controllers are typically used to control actuated intersections. They detect the current traffic flow through a set of loop detectors and adjust the signal phases of the traffic lights accordingly. While loop detectors are dependable and robust, they are also cost- and service-intensive.

smartmicro traffic detectors offer cost-effective and seamless loop replacement through above-ground, non-invasive radar technology. To connect the radar sensors to cabinets for loop replacement, COM HUB Relay 8 is used, as it offers onboard relay outputs. The relay output will be connected to the traffic controller.

COM HUB Relay 8 is compatible with TOPGRD and TRUGRD Family sensors. The maximum tested cable length for the PLC communication between a sensor and COM HUB Relay 8 is 300m (984ft).

As explained above, a PLC J-Box is required for each sensor on the sensor end of the cable. Up to 2 sensors can be connected. When using TRUGRD Stream, the mpg video stream is transferred via the same cable and is available for the end user at the ETH1 output of COM HUB Relay 8.

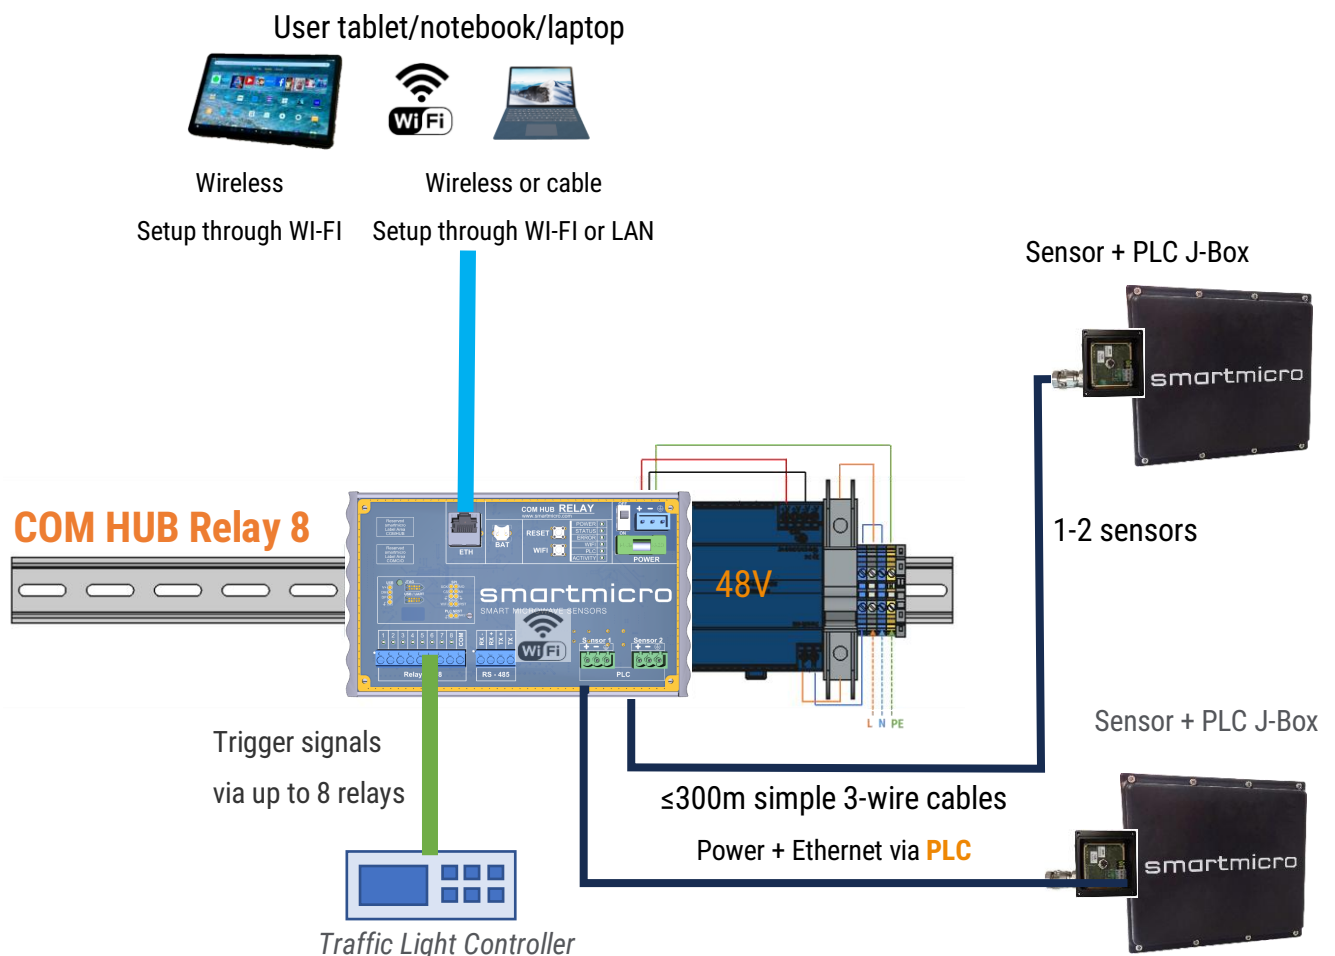

Connecting 2 smartmicro sensors to a controller through COM HUB Relay 8

8 COMPLIANCES³

The COM HUB Relay 8 complies with the following EU directives:

- RED 2014/53/EU
- EMC 2014/30/EU
- Safety 2014/35/EU
- RoHS 2011/65/EU
- EC 1907/2006 REACH

Applied standards:

- Spectrum Usage:
 - o EN 300 328 V2.2.2
- EMC:
 - o EN 301 489-1 V2.2.3
 - o EN 301 489-17 V3.2.4
 - o EN IEC 61000-6-2:2005
 - o EN IEC 61000-6-3:2007+A1:2011 + AC:2012
- Health and Safety:
 - o EN 62311: 2008
 - o EN 62368-1: 2014 + AC: 2015

According to the surge protection, the COM HUB Relay 8 complies also with the following regulations:

- IEC 61000-4-2 (ESD)
- IEC 61000-4-4 (fast transients)
- IEC 61000-4-5 (Surges)

Regarding operating conditions like temperature, vibration etc., the COM HUB Relay 8 will be tested and certified by independent test labs to comply with:

- NEMA TS-2

Regarding spectrum usage, this sensor model will be tested and certified by independent test labs (formally approved by a test lab or notified body):

- EU RED directive
- EU EMC directive
- 47 CFR FCC Part 15 B
- 47 CFR FCC Part 15 C Section 15.247
- ICES 003
- RSS-247

³ Pending

Note: This statement of compliance means that the COM HUB Relay 8 allows operation compliant to the listed standards. However, not all standards are certified through test labs. Formal frequency approval or registration is not accomplished for all countries. In certain countries or regions, a customer-specific local frequency approval is reasonable. smartmicro supports customers throughout this process.

This device is NOT compliant to ISO IEC62443, to the EU CRA or similar international regulations. This device features an Ethernet port and/or WIFI connectivity. It is explicitly NOT INTENDED to be connected to the Internet or any other, unprotected network. The built-in connectivity is intended to be used exclusively for on-site use, or for use in a protected, proprietary user network. The user remains in charge to comply with any cyber-security and related regulations to protect the device from misuse on-site and in the user's network.

9 LEGAL DISCLAIMER NOTICE

All products, product specifications and data in this document may be subject to change without notice to improve reliability, function or otherwise.

Not all products and/or product features may be available in all countries and regions. For legal reasons features may be deleted from products or smartmicro may refuse to offer products. Statements, technical information and recommendations contained herein are believed to be accurate as of the stated date. smartmicro disclaims any and all liability for any errors, inaccuracies or incompleteness contained in this document or in any other disclosure relating to the product.

To the extent permitted by applicable law, smartmicro disclaims (i) any and all liability arising out of the application or use of the product or the data contained herein, (ii) any and all liability of damages exceeding direct damages, including - without limitation - indirect, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of the suitability of the product for particular purposes.

Statements regarding the suitability of products for certain types of applications are based on smartmicro's knowledge of typical requirements that are often placed on smartmicro products in generic/general applications. Statements about the suitability of products for a particular/specific application, however, are not binding. It is the customer's/user's responsibility to validate that the product with the specifications described is suitable for use in the particular/specific application. Parameters and the performance of products may deviate from statements made herein due to particular/specific applications and/or surroundings. Therefore, it is important that the customer/user has thoroughly tested the products and has understood the performance and limitations of the products before installing them for final applications or before their commercialization. Although products are well optimized to be used for the intended applications stated, it must also be understood by the customer/user that the detection probability may not be 100% and that the false alarm rate may not be zero.

The information provided, relates only to the specifically designated product and may not be applicable when the product is used in combination with other materials or in any process not defined herein. All operating parameters, including typical parameters, must be validated for each application by the customer's/user's technical experts. Customers using or selling smartmicro products for use in an application which is not expressly indicated do so at their own risk.

This document does not expand or otherwise modify smartmicro's terms and conditions of purchase, including but not being limited to the warranty. Except as expressly indicated in writing by smartmicro, the products are not designed for use in medical, life-saving or life-sustaining applications or for any other application in which the failure of the product could result in personal injury or death.

No license, expressed or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of smartmicro. Product names and markings noted herein may be trademarks of their respective owners.

Please note that the application of the product may be subject to standards or other regulations that may vary from country to country. smartmicro does not guarantee that the use of products in the applications described herein will comply with such regulations in any country. It is the customer's/user's responsibility to ensure that the use and incorporation of products comply with regulatory requirements of their markets.

If any provision of this disclaimer is, or is found to be, void or unenforceable under applicable law, it will not affect the validity or enforceability of the other provisions of this disclaimer.