

PRODUCT INFORMATION

TRAFFIC MANAGEMENT ACCESSORY

Handheld Electronic K-Band Target Simulator Doppler Generator
EKTSDG- 010101



s.m.s, smart microwave sensors GmbH
In den Waashainen 1
38108 Braunschweig
Germany

Phone: +49 (531) 390 23-0
Fax: +49 (531) 390 23-599
info@smartmicro.de
www.smartmicro.com

CONTENT

1	USER SAFETY WARNING	3
2	PRODUCT SPECIFICATIONS	4
2.1	FEATURES AND APPLICATIONS	4
2.2	CONFIGURATION SOFTWARE	4
3	CHARACTERISTICS.....	5
4	LEGAL DISCLAIMER NOTICE	6

1 USER SAFETY WARNING

Please read the entire document carefully before using the device.

INSTALLATION

Please pay attention to the details below before installing and connecting the device:

- Only use provided or approved equipment for the operation.
- Only skilled and instructed persons shall install and connect the device.
- All connectors are pin-coded and fit in only one position.
- Be cautious when using the device on or around active roadways and pay attention to moving traffic.
- Make sure that test procedures are in accordance with local safety policies and procedures as well as company practices.

OPERATION

Please note that the device is not waterproof. Take care of proper rain coverage when working outside. Do not operate the device if the device itself or any cables are damaged.

Transmission of radio frequency waves starts after the device is powered up and stops after it is switched off.



Do not dispose waste electrical and electronic equipment in household trash.

TECHNICAL SERVICE

Only use provided or approved equipment for operation.

Do not attempt to service or repair this device:

- No user-maintainable parts are contained in the device.
- To avoid electrical shock, do not remove or open the cover.
- Unauthorized opening will void all warranties.
- smartmicro is not liable for any damages or harms caused by unauthorized attempts to open or repair the device.

RADIATION

This device generates radio frequency energy. There are strict limits on continuous emission power levels to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment.

- Human exposure to transmitted waves from this device is generally considered as safe. Even though, it is considered good practice that humans are not subject to higher radiation levels than necessary.

This device may interfere with other devices using the same frequency band.

2 PRODUCT SPECIFICATIONS

EKTSDG-010101 (Electronic K-band Target Simulator Doppler Generator) is a battery powered handheld, portable moving target simulator for K-band (24GHz) radar sensors.

It can be used for:

- Alignment of sensors in the field at the time of installation
- Field or lab calibration and year-by-year inspection of sensors
- General functional testing of sensors in the field or in the lab

This device was specifically developed to work with smartmicro 24GHz sensors. It is capable to simulate a moving target in static distances of up to 100m and can for instance be placed close to a stop line of an intersection to check the alignment of one or multiple radar sensors.

A software generated modulation signal allows for generation of low distortion and directional Doppler signals from 44Hz to 13,4kHz corresponding to any speeds from 1 to 300km/h.


2.1 FEATURES AND APPLICATIONS

The handheld K-Band Target Simulator Doppler Generator has the following features:

- Programmable speed interval from 1 to 300km/h
- Programmable movement direction
- Programmable signal level
- Programmable presets
- Rechargeable battery
- Standalone or hosted operation
- USB interface to host computer
- Compact and rugged construction

2.2 CONFIGURATION SOFTWARE

The device may be connected to any Windows PC via USB. The included configuration software allows real-time remote controlling and the configuration of presets of the EKTSDG-010101.

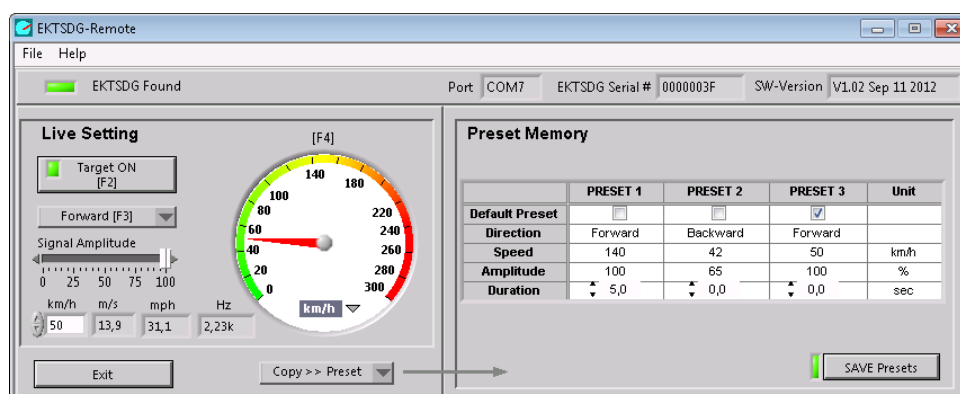

Configuration Software

3 CHARACTERISTICS

Parameter	Conditions/Notes	Symbols	Typical Values (min... max.)
Operating Conditions			
Supply Voltage	Battery	V_{ccBatt}	3.7V (3.5...4.1V)
	USB	V_{ccUSB}	5V (4.5...5.5V)
External Supply Current	Operating	I_{cc1}	200mA (max. 500mA)
	Charging	I_{cc2}	450mA (max. 500mA)
Battery	Capacity (T=25°C)	C_{LiPo}	1500mAh
	Lifetime (full charging cycles)	-	500 cycles
Temperature	Operating (non-condensing)	T_{op}	(0°C...+60°C) (32...+140°F)
	Storage	T_{st}	(-20...+80°C) (-4...176°F)
Doppler Simulator			
Frequency Range	Transmit frequency	f_{TG}	(24.000...24.250GHz)
Doppler Frequency Range	Digitally adjustable	$f_{Doppler}$	(44...14300Hz)
Simulated Speed Range	Digitally adjustable	$V_{Doppler}$	(1...300km/h) (0.6...186mph)
Output Power Range	Adjustable signal level	P_{out}	(1...100%)
Antenna Gain	F=24.125GHz	G_{Ant}	15dBi
Antenna Polarization	-	-	Linear, vertical
Horizontal -3dB Beam Width	E-Plane	W_{ϕ}	24°
Vertical -3dB Beam Width	H-Plane	W_{θ}	27°
Sidelobe Level	E- and H-Plane	D	(max. -15dB)
Overall Gain	For linear polarized transceivers	-	65dB
Equivalent Reflectivity	For linear polarized transceivers	RCS_{in}	25m ²
Frequency Error Doppler Signal	Crystal controlled	$\Delta f_{doppler}$	(max. 1%)
Drift in Overall Gain	-	-	(max. ±3dB)
Harmonics in generated Doppler ¹	$f_{doppler} = 1kHz$	$H_{Doppler}$	(max. -10dBc)
Harmonics in RF Spectrum	$F_{RF} = 24.125GHz$	H_{RF}	(max. -30dBm)
Radiated Power	EIRP	P_{sat}	(max. 20dBm)
Mechanical Details			
Outline Dimensions	-	-	68mm x 128mm x 24mm
Weight	Including LiPo Battery	-	180g
Further Information			
Host Interface	USB	-	serial USB, mini-USB connector
Enclosed Accessories	-	-	protection case, soft case, USB cable

¹ Above a simulated speed of ~200km/h (~124mph), the harmonics level in the generated Doppler will degrade.

4 LEGAL DISCLAIMER NOTICE

All products, product specifications and data in this document may be subject to change without notice to improve reliability, function or otherwise.

Not all products and/or product features may be available in all countries and regions. For legal reasons features may be deleted from products or smartmicro may refuse to offer products. Statements, technical information and recommendations contained herein are believed to be accurate as of the stated date. smartmicro disclaims any and all liability for any errors, inaccuracies or incompleteness contained in this document or in any other disclosure relating to the product.

To the extent permitted by applicable law, smartmicro disclaims (i) any and all liability arising out of the application or use of the product or the data contained herein, (ii) any and all liability of damages exceeding direct damages, including - without limitation - indirect, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of the suitability of the product for particular purposes.

Statements regarding the suitability of products for certain types of applications are based on smartmicro's knowledge of typical requirements that are often placed on smartmicro products in generic/general applications. Statements about the suitability of products for a particular/specific application, however, are not binding. It is the customer's/user's responsibility to validate that the product with the specifications described is suitable for use in the particular/specific application. Parameters and the performance of products may deviate from statements made herein due to particular/specific applications and/or surroundings. Therefore, it is important that the customer/user has thoroughly tested the products and has understood the performance and limitations of the products before installing them for final applications or before their commercialization. Although products are well optimized to be used for the intended applications stated, it must also be understood by the customer/user that the detection probability may not be 100% and that the false alarm rate may not be zero.

The information provided, relates only to the specifically designated product and may not be applicable when the product is used in combination with other materials or in any process not defined herein. All operating parameters, including typical parameters, must be validated for each application by the customer's/user's technical experts. Customers using or selling smartmicro products for use in an application which is not expressly indicated do so at their own risk.

This document does not expand or otherwise modify smartmicro's terms and conditions of purchase, including but not being limited to the warranty. Except as expressly indicated in writing by smartmicro, the products are not designed for use in medical, life-saving or life-sustaining applications or for any other application in which the failure of the product could result in personal injury or death.

No license, expressed or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of smartmicro. Product names and markings noted herein may be trademarks of their respective owners.

Please note that the application of the product may be subject to standards or other regulations that may vary from country to country. smartmicro does not guarantee that the use of products in the applications described herein will comply with such regulations in any country. It is the customer's/user's responsibility to ensure that the use and incorporation of products comply with regulatory requirements of their markets.

If any provision of this disclaimer is, or is found to be, void or unenforceable under applicable law, it will not affect the validity or enforceability of the other provisions of this disclaimer.